

## TagMatiks Pre-printed, Pre-encoded, 4" x 2", RFID Labels



### Ordering Information

SKU: TAG-EK-LBL-42

Frequency: 865-868 MHz (ETSI)

### 01 Why use pre-printed, pre-encoded RFID Labels?

Leverage pre-printed and pre-encoded tags to simplify RFID tag and asset pairing (also known as commissioning) with TagMatiks. For ease of use, the same unique number is not only encoded into the RFID tag but also printed in human readable text and barcode formats.

### 02 What sizes of TagMatiks RFID Labels are available?

There are a wide variety of labels sizes available with different configurations. Sample options include 4" x 1", 2" x 1", 1.75" x 0.75", 4" x 6".

### 03 When should I use on-metal vs standard labels?

The on-metal labels should be leveraged when tagging assets or items that have metallic composition.

### 04 What's the difference between the standard labels and PET labels?

The PET labels are designed with a layer of PET substrate to provide a more durable label for tougher use cases.



### What can be tagged with Pre-printed & Pre-encoded Labels?

- Industrial logistics
- Asset tracking
- Work-in-process monitoring
- Automation and Manufacturing
- Tool tracking
- And more!



NEED HELP WITH YOUR SOLUTION OR MORE DETAILS? CONTACT US!

## TagMatiks Pre-printed, Pre-encoded, 4" x 2", RFID Labels

SKU: TAG-EK-LBL-42


Frequency: 865-868 MHz (ETSI)

### Contact

- +91 9205947800
- indiastore@rfid4ustore.in
- rfid4ustore.in


### Location

- Level 5, Estel House Plot No.126, Sector – 44, Institutional Area, Gurugram – 122002, Haryana, India

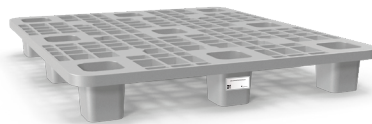

### Radio Frequency Specification

Air Protocols	-	ISO 18000-6C
Operating Frequency	-	860-960 MHz
IC Type	-	NXP Ucode 8
User Memory	-	N/A

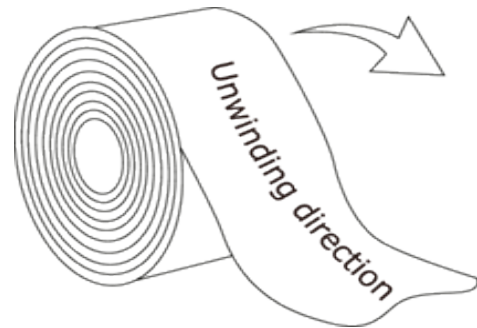

### Physical Specification

Attachment Method	-	High-performance adhesive
Operating Temperatures	-	-40°C/+85°C (-40°F/+185°F)
Dimensions	-	4 x 2 inches (101.6mm x 50.8mm)